

LED TUBE – 277V



This product is suitable for factories, offices, banks, hospitals, supermarkets, schools and other place of indoor that need high-brightness and energy saving.

Commercial Lighting

-  Recessed
-  AR111
-  Bulb
-  Tube
-  MR16
-  Panel

Feature

- Type : G13
- Beam Angle : 220°
- Color : neutral white / cool white
- Working lifespan : 20,000 hrs

Light Source

- Light Source : SMT Type
- Luminous Flux : 2FT - 900lm
4FT - 1800lm
- CCT : neutral white 4000K / cool white 6000K
- CRI : >80


Electrical Characteristics

- Power Consumption : 10W / 20W
- Input Voltage : AC100~277V
- Electrical Efficiency : 50~60 Hz
- Power factor : >0.9


Geometrical

- Body Size : 2FT - Ø26x 580 mm/590 mm
4FT - Ø26 x L1198 mm
- Tube Material : PC
- Cap Material : PBT(UL-94V0)
- Net weight : 90g / 150g
- Operating temperature : -20°C~40°C

Optical

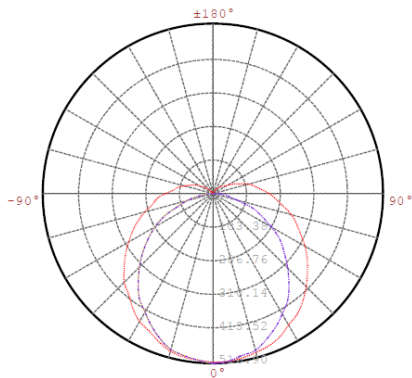


Dimension

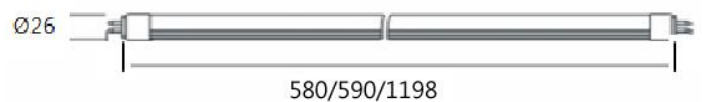

Installation Guide



Step 1.
Turn the
Power Off



Step 2.
Setup



Step 3.
Turn the
Power On

Safety Warning

- Input voltage do not over 305V AC.
- An qualified technician is needed as implemented the installation process.
- Turn-off the city power and make sure all of the facilities are safety before installation or maintenance.
- Don' t drop or impact the luminaries during installation process.
- Confirm the installation process has completed again.